

Model
TOUCAN 12E
MAST BOOM LIFTS

JLG®

MORE ECONOMIC

- Electric power for zero emissions and near-silent running indoors.

MORE PRODUCTIVE

- No waiting with immediate-response AC drive motors for greater torque and efficiency.

MORE ACCESS

- Get into more places with compact dimensions and precise control system.

SMART DESIGN

- Extended reach and up-and-over height with heavy duty forklift-style mast and versatile articulating jib.

Standard Features

- 0.70 m x 1.05 m (L x W) steel platform
- Slide bar rear entry
- Full proportional drive and slew joystick control with integral thumb steer switch
- Mini joysticks provide proportional mast, telescope and jib lift/lower functions
- 3.19 m articulating jib
- Function enable with enlarged LCD function status display
- Load sensing system
- AC power cable to platform
- Large tool tray
- Two wheel direct electric drive
- Brushless AC drive motors
- Powered battery fill
- Auto power save when idle
- Low charge function cut-out
- On-board diagnostics with integral display
- Automatic rear wheel brakes
- Sculptured polyester hoods
- Powered platform rotation
- Heavy duty steel roller mast with 345° rotation
- Chain slack detection system
- 3 degree tilt alarm and indicator light
- 1.20 m wide frame
- Lifting /tie down rings
- Ground control selector switch with key lock
- Battery discharge indicator
- Hour meter
- Horn
- Drive orientation system
- Lanyard anchor points
- Zenon strobe light
- Manual descent system
- Passive pothole protection system



Standard Specifications

• Tyres (non-marking solid)	457 mm x 178 mm
• Electrical system	48V DC
• Batteries (deep cycle)	48V - 260 A/hr
• Charger	On-board 110V/230V HF
• Drive motors	Dual AC motors
• Electrical (pump) motor	3.5kw - 48V DC
• Hydraulic system	15L

Accessories & Options

• 8 mm air line to platform	• Synthetic Biodegradable Hydraulic Oil
• 255A/hr AGM Battery & on board HF charger	• Obstacle detection frame
• LED Platform worklight	• Special paint colour
• Food Compatible Hydraulic Oil	• Fixed (non-rotating) platform
• Platform Power Plug & Socket ¹	• Platform work lights 70W
• Soft Touch 0.70 m x 1.05 m Platform Proximity System	

¹ Included with circuit breaker on AC cable to platform option. NB 110V or 230V power must be specified

Model **TOUCAN 12E** MAST BOOM LIFTS

Performance


• Working height	11.83m
• Working outreach (standard platform)	5.10m
• Up and over height	7.12m
• Swing (not continuous)	345°
• Platform capacity ¹	200 kg
• Jib - overall length	3.19m
• Jib - range of articulation	120° (+60° / -60°)
A. Platform size standard platform (L x W)	0.70m x 1.05m
B. Overall width	1.20m
C. Tailswing	13cm
D. Stowed height	1.99m
E. Overall length (standard platform)	3.65m
F. Wheelbase	1.60m
G. Ground clearance	10cm
• Machine weight - standard platform ²	4,300 kg
• Maximum ground bearing pressure	12,5 kg/cm ²
• Drive speed - lowered	6.0 km/h
• Turning radius (outside)	2.60m
• Turning radius (inside)	0.75m
• Gradeability	30%

¹ Capacity shown is maximum two persons indoor and outdoor (12.5 m/s wind speed)


² Certain options or country standards may increase weight and/or dimensions.



Reach Diagram

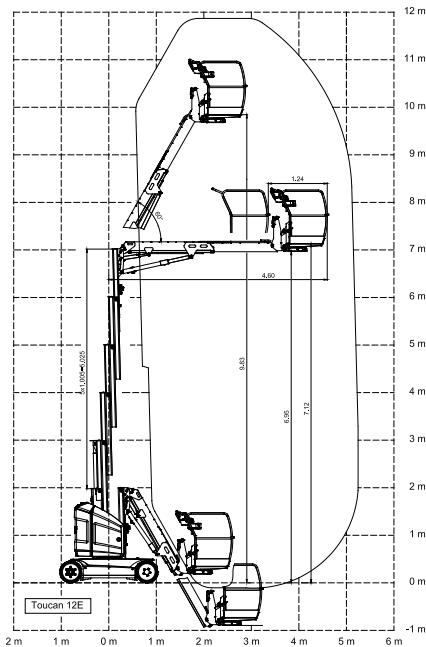

Dimensions

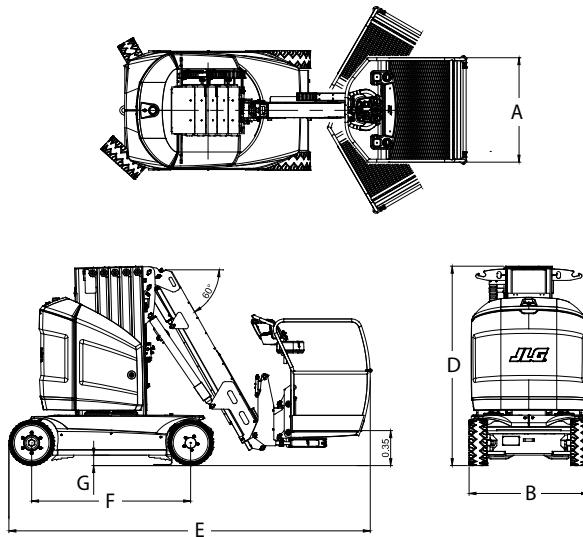

IMPORTANT

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

JLG

JLG EMEA BV

Polaris Avenue 63
2132 JH Hoofddorp
The Netherlands
Phone: +31 (0)23 565 5665
www.jlg.com

An Oshkosh Corporation Company